

Default:

Slave, 9600 baud rate, N, 8, 1. Pincode 1234

AT command:

1. Communications Test :

Sent : AT

receive : OK

2. Change baud rate :

Sent : AT+BAUD1

receive : OK1200

Sent : AT+BAUD2

receive : OK2400

1-----1200

2-----2400

3-----4800

4-----9600

5-----19200

6-----38400

7-----57600

8-----115200

Baud rate setting can be save even power down.

3. Change Bluetooth device name:

Sent : AT+NAMEdevicename

receive : OKname

(devicename is the name you want the device to be , and it will be searched with this name)

Name setting can be save even power down.

4. Change Pincode:


Sent : AT+PINxxxx

receive : OKsetpin

(xxxx is the pin code you set)

Pin code can be save even power down.

Pin Map:

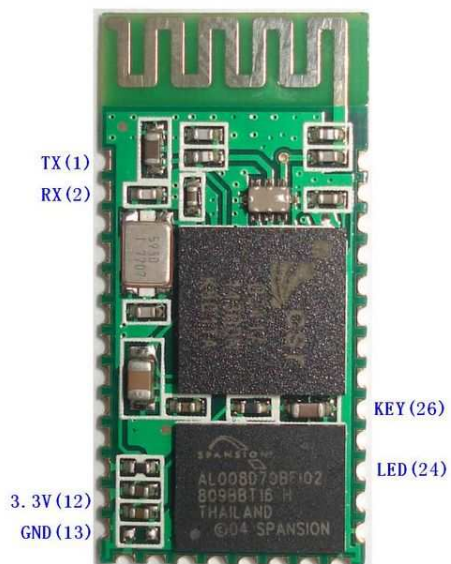

Demonstration Circuit:

